


DATA SHEET

WIEGAND WIRE SENSOR WS-WFS-4-U0

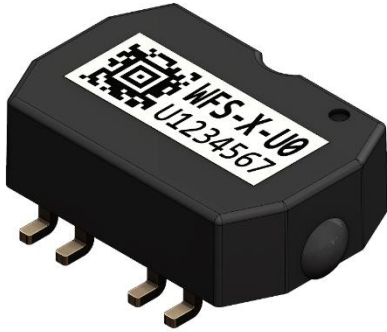

- ▶ Wiegand Wire Sensor for energy harvesting multiturn encoders using the Wiegand effect to generate energy from a rotating magnetic field¹
- ▶ Optimized for operation with the multiturn counter module iC-PMX from iC-Haus
- ▶ In surface mounted technology suitable for reflow process, RoHS 2 compatible
- ▶ 2,5 mm wire distance from top of seating plane
- ▶ High Pulse energy with typical 140 nJ average pulse energy
- ▶ Machine readable serial number provides perfect traceability

1. Signal Characteristics

Item No.	Parameter	Symbol	Min.	Typ.	Max.	Unit	Remarks
101	Pulse peak-voltage	U_P	5.3	6.5		V	Valid for each trigger configuration i (Figure 4) with $U_{Pi,Average} - 4\sigma \geq U_{P,min}$, analysis over 4*500 pulses @20 – 27°C @6.8 ± 1% nF
102	Pulse slew rate	S_R	200			V/ms	@20 – 27°C, 30% - 70% U_P
103	Pulse energy	E_P		140		nJ	@6.8 ± 1% nF
104	Temperature drift V_{peak}	T_D		-0,008		V/K	

2. Electrical Characteristics

Item No.	Parameter	Symbol	Min.	Typ.	Max	Unit	Conditions
201	Coil resistance	R	250	270	290	Ω	@20 - 27°C, DC
202	Temp. Coefficient of Resistor	TC_R		$3,9 \cdot 10^{-3}$		1/K	
203	Coil inductance	L	10.5		14.5	mH	measured @1 kHz with magnet (polarity) parallel to wire axis.

¹ Devices and processes for energy harvesting by Wiegand wire within position encoders are protected by several worldwide patents (such as WO 2004/046735 A1) and require licensing by the inventors and applicants.

DATA SHEET

WIEGAND WIRE SENSOR WS-WFS-4-U0

3. Environmental

Item No.	Parameter	Symbol	Min.	Typ.	Max	Unit	Conditions
301	Ambient operating temperature range	T_a	-40		+125	°C	
302	Relative humidity	rF			90%		No condensation
303	Shock Resistance	S_r			100	g	half sine 6 ms, EN 60068-2-27
304	Permanent shock resistance	S_{rp}			10	g	half sine 16 ms, EN 60068-2-29
305	Vibration Resistance	V_f			10	g	10 Hz-1000 Hz, EN 60068-2-6
306	Insulation Resistance	R_{ISO}	600			MΩ	Insulation resistance between pin and housing @ 1KV, FGluke 1577 isolation multimeter
307	Contact discharge	D_c			6	kV	IEC 61000-4-2
308	Air charge	D_A			8	kV	IEC 61000-4-2
309	Max. allowed external magnetic field to be applied to sensor not in operation	B_{exmax}			25	mT	e.g. important for storage and handling
310	Storage Temperature	T_s	-40		+85	°C	

4. Measurement Conditions

Item No.	Parameter	Symbol	Min.	Typ.	Max	Unit	Conditions
401	Magnetic flux density at Wire	B_w	8.75		9.15	mT	Measured at wire axis
402	Distance magnet to wire	W_d	8.4	8.5	8.6	mm	Measured from wire to magnet surface, valid for FRABA magnet only!
403	x and y assembly tolerance		-0.15		0.15		Measured from sensor centre – rotational axis
404	Magnet eccentricity				0.1	mm	
405	Load capacitor	C_L	6.7	6.8	6.9	nF	In parallel with IC-PMX (Figure 2)
406	Magnet rotation speed	v		1,000		rpm	
407	Input resistance	R_M		10		MΩ	Measurement device
408	Input capacitance	C_M		12		pF	Measurement device

Remarks

Magnet type: Diametral magnet, SmCo, dimensions $\varnothing 8 \times 2.5$ mm (Figure 1), article number 10034032

Data measured under ideal measuring conditions. Test setup is isolated from the external magnetic fields or other ferromagnetic components.

DATA SHEET

WIEGAND WIRE SENSOR WS-WFS-4-U0

5. Magnet System

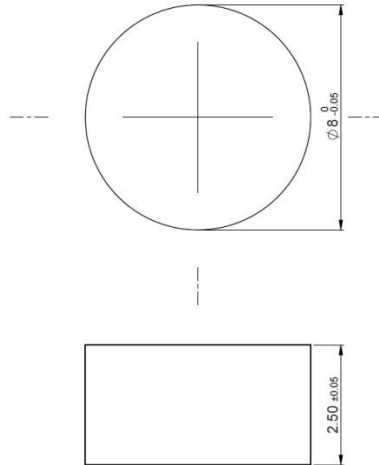


Figure 1

6. Test Circuit

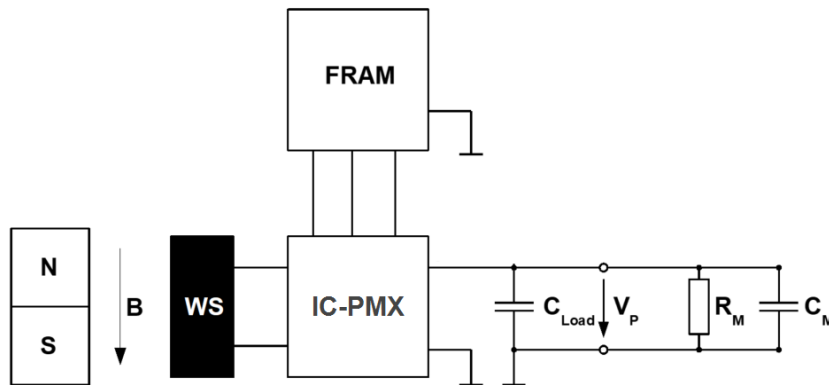


Figure 2

DATA SHEET

WIEGAND WIRE SENSOR WS-WFS-4-U0

7. Typical Signal Wave

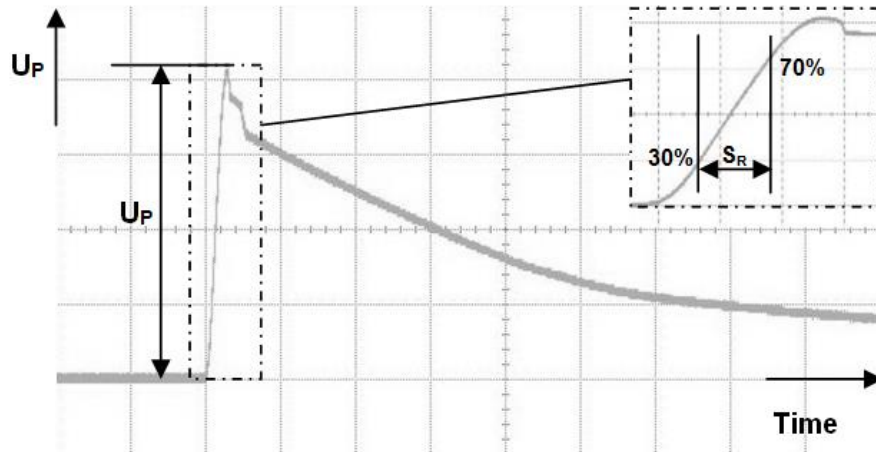


Figure 3

8. Declaration Trigger Point


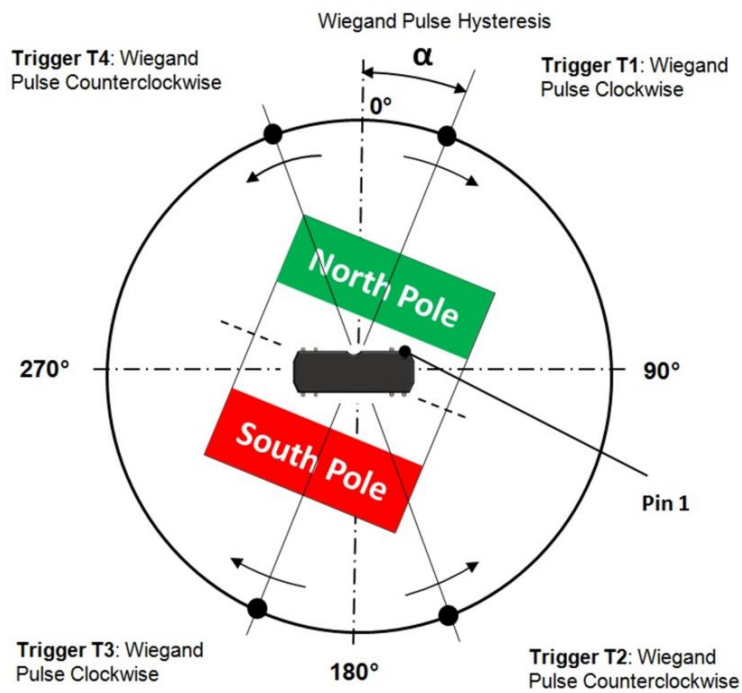


Figure 4

DATA SHEET

WIEGAND WIRE SENSOR WS-WFS-4-U0


9. Component Dimension Type: WFS-4

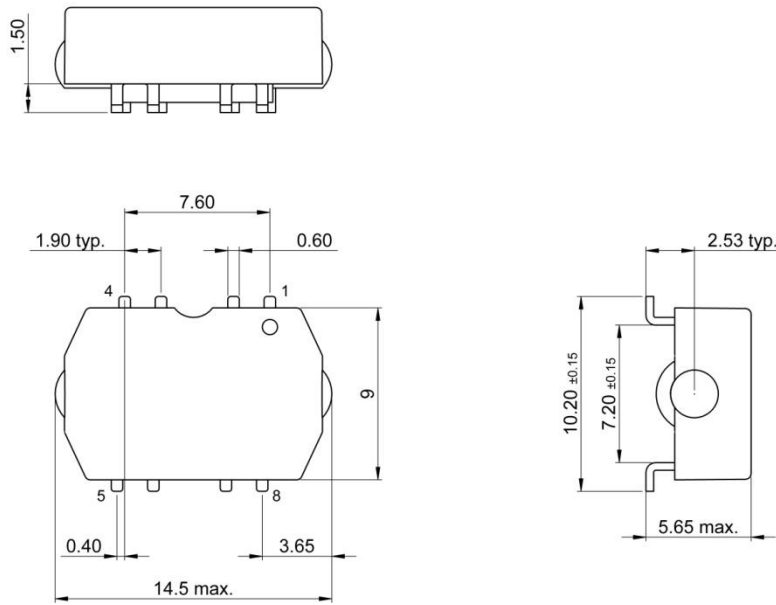

Coplanarity tolerance of leads 0.1 mm.
All dimension in mm.

Figure 5

10. Land Pattern Dimensions

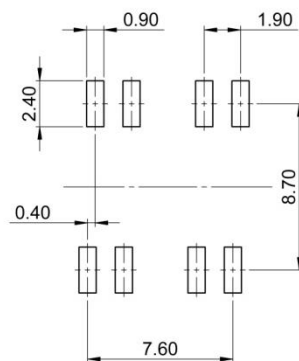

All dimension in mm.

Figure 6

DATA SHEET

WIEGAND WIRE SENSOR WS-WFS-4-U0

Item No.	Parameter	Symbol	Min.	Typ.	Max	Unit	Conditions
1001	Sensor terminals			Pin 1 / Pin 2 and Pin 5 / Pin 6			Pin 1 / Pin2: coil-winding start Pin 5 / Pin 6: coil-winding end Pin 3,4,7,8 not used


Remarks

Pin material Cu, mass 0.029 g, results in a theoretical thermal energy surge of $\Delta Q \approx 2 \text{ W}$ for each contact pin (390 W/(kg*K) and ΔT_{reflow} of 170 K.

SMD package, suitable for reflow process

RoHS 2 Compatible

11. Reflow Profile

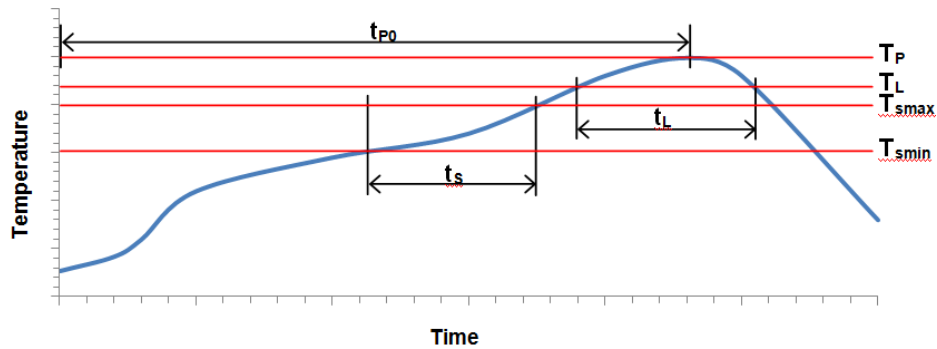

Item No.	Parameter	Symbol	Min.	Typ.	Max	Unit	Conditions
1101	Liquidous temperature	T_L		217		°C	Soldering paste material: Sn95.5Ag4Cu0.5
1102	Time maintained above T_L	t_L		60		s	
1103	Peak package body temperature	T_p		249		°C	
1104	Time 25 °C to T_p	t_{p0}		230		s	
1105	Preheat / Soak temperature min	T_{smin}		150		°C	
1106	Preheat / Soak temperature max	T_{smax}		200		°C	
1107	Time from T_{smin} to T_{smax}	t_s		70		s	
1108	Ramp-up rate (T_L to T_p)			0.9	3	K / s	
1109	Ramp-down rate (T_p to T_L)			1.3	6	K / s	
1110	Reflow soldering speed	v_s		1000.0		mm / min	reflow soldering machine: Linie VX-nitro-3500 (Type 734)

DATA SHEET

WIEGAND WIRE SENSOR WS-WFS-4-U0

12. Labeling Information

Type and Serial number

Serial Number in Aztec Code



DATA SHEET


WIEGAND WIRE SENSOR WS-WFS-4-U0

13. Packaging Information

13-inch reel. (10045706)

max. 700 pcs./reel

Connectors across to reel.

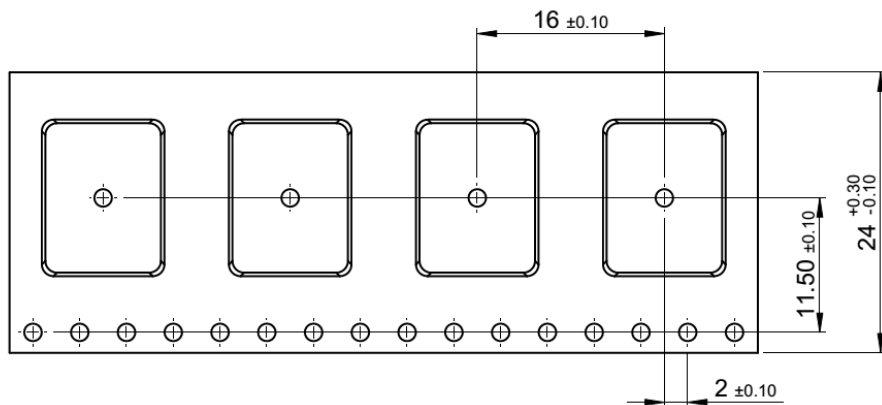


Sensors packed in ESD Tray (10046043)

Tray Specification: 98 cavities per tray.

Orientation of sensor in cavity: Pin 1, top right corner of each cavity

Standard Pack Quantity: 9 trays = 882pcs, packed in ESD shielded vacuum bag

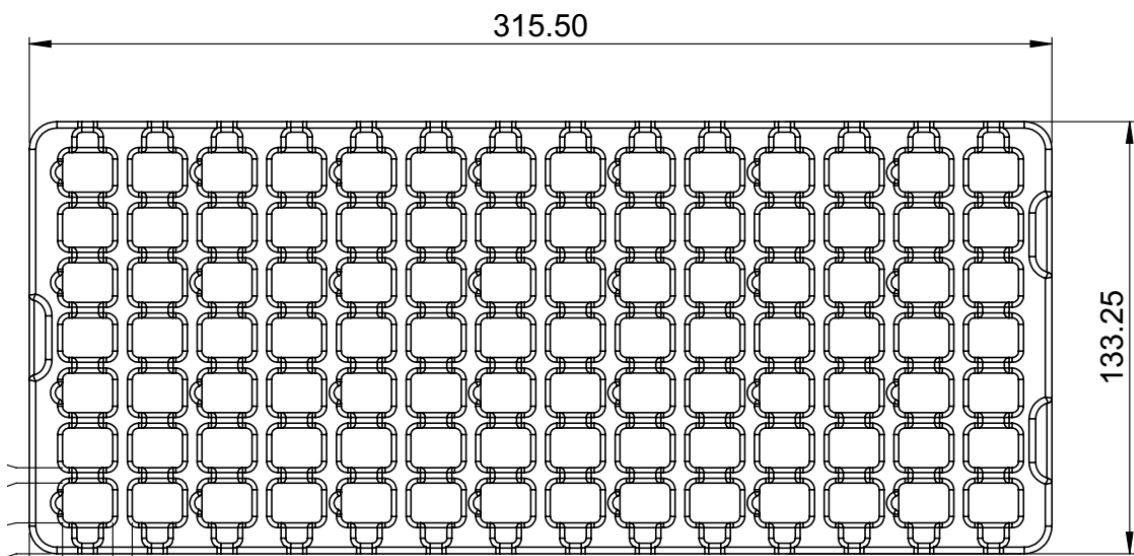

DATA SHEET WIEGAND WIRE SENSOR WS-WFS-4-U0

14. Ordering Information

Article Name	Article Number
WS-Sensor-WS-WFS-4-U0 on Reel	10045706
WS-Sensor-WS-WFS-4-U0 in Tray	10046043

15. Revision History

Rev.:	Date	BY	Remarks
2.0	02.27.2018	MFO	Created UBITO standard product data sheet, copy from WFS-0-U0
2.1	19.10.2017	MFO	Updated Product Pictures
2.2	20.10.2017	MFO	Minor corrections: Title chapter 9 Label on product pictures
2.3	29.06.2018	TBE	Updated 203 Coil inductance and clarified conditions to "measured @10 kHz with magnet (polarity) parallel to wire axis." 309 "Max. magnetic field exposure" wording changed to "Max. allowed external magnetic field to be applied to sensor not in operation" Added tray packing details Contact address for technical support team updated 403 definition changed to "x and y assembly tolerance"

Editor: TBE

Reviewer: RRU, MLO

Date: 29.06.2018

Module Type: WS-WFS-4-U0

16. Technical Information

For technical support, information about prices and terms of delivery please contact	
FRABA Pte. 114 Lavender Street, #08-60 CT Hub 2 (Lobby 3) Singapore 338729 Singapore	FRABA GmbH Zeppelinstraße 2 50667 Köln, Deutschland

DATA SHEET

WIEGAND WIRE SENSOR WS-WFS-4-U0

Contact

FRABA America

T +1 609 750-8705

[✉ info@posital.com](mailto:info@posital.com)

FRABA Europe

T +49 221 96213-0

[✉ info@posital.eu](mailto:info@posital.eu)

FRABA Asia

T +65 6514 8880

[✉ info@posital.sg](mailto:info@posital.sg)

All dimension in [inch] mm. This drawing and the information contained is for general presentation purposes only. Please refer to the "Download" section for detailed technical drawings.

© FRABA B.V., All rights reserved. We do not assume responsibility for technical inaccuracies or omissions. Specifications are subject to change without notice.